


## Load Transmitter

### Product Overview

The Din-Rail mount Slim Load Transmitter which transmits load data through Analog (4-20mA/0 - 10V) and Digital (RS485). Upto 6 Load cells can be connected to the transmitter in parallel.

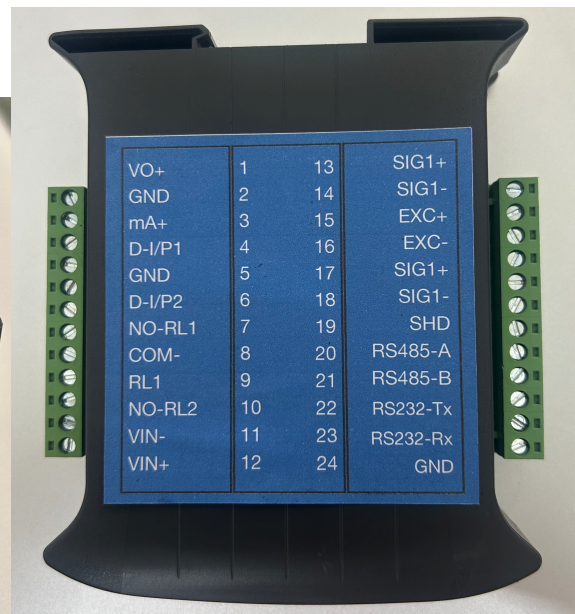

### Specifications

| Parameters             | Values                                              |
|------------------------|-----------------------------------------------------|
| Input Power            | +24VDC                                              |
| Load Cell Inputs       | Upto 6 in Parallel                                  |
| A/D Converter          | 24-bit                                              |
| Display                | 6 Digit 7 Segment                                   |
| Digital Inputs         | 2                                                   |
| Relay Outputs          | 2 Channel NO Output (230V/5A)                       |
| Analog Output          | 4-20mA or 0 - 10V                                   |
| Serial Ports           | RS485 & RS232                                       |
| Wireless Communication | Wi-Fi based webpage for calibration & configuration |



|                       |                  |
|-----------------------|------------------|
| Internal Data Storage | Upto 2MB         |
| Product Dimensions    | 120 x 101 x 35mm |
| Enclosure Material    | ABS              |
| Operating Temperature | -40 to 70°C      |

## Mechanical Drawing

